

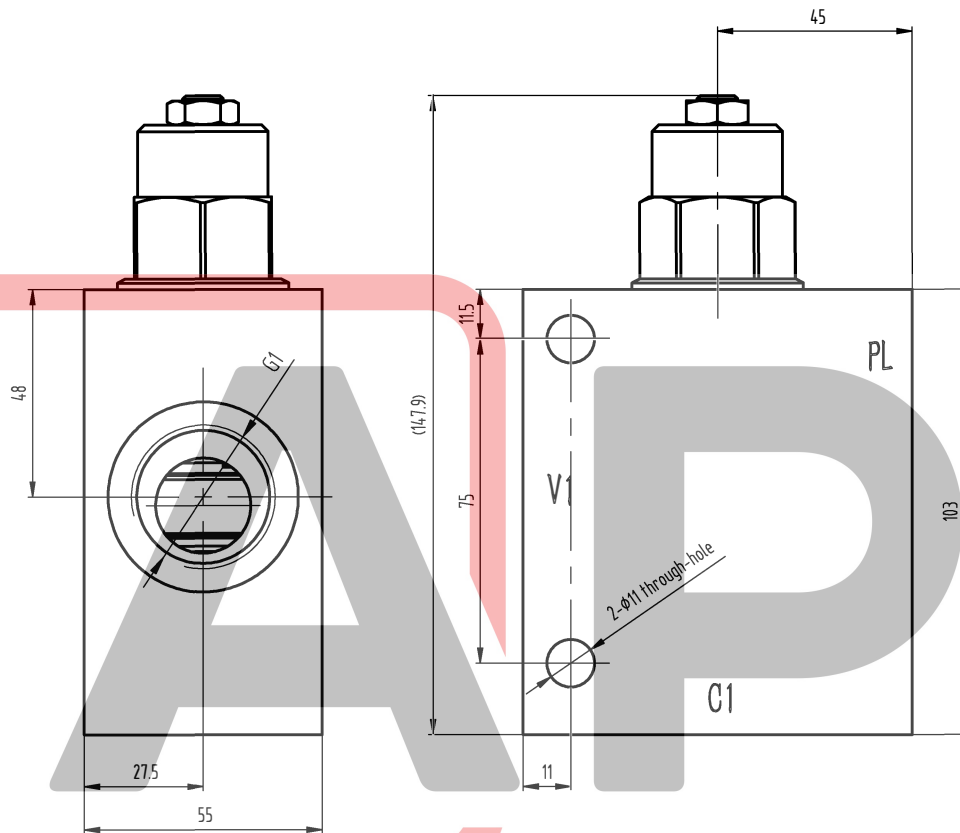


AKT350-200

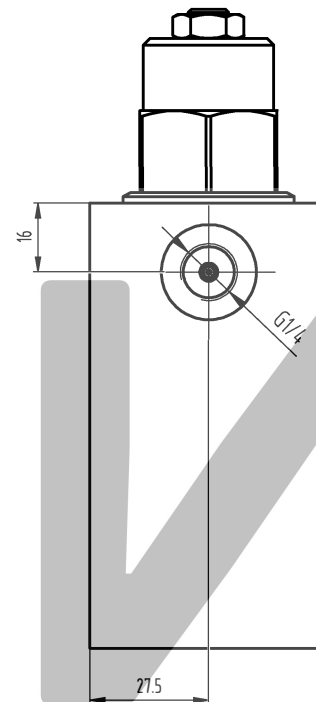


Turn adjustment clockwise to decrease setting
and release load ↻

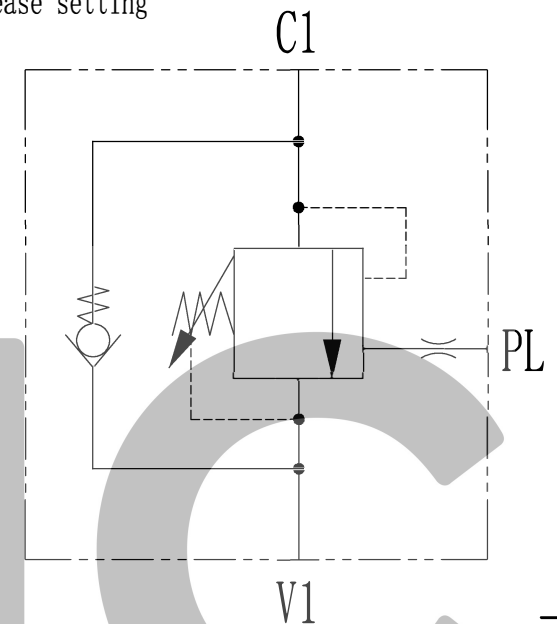

Basic parameters:

1. Max work pressure: 35MPa;
2. Rated flow rate: 200L/min;
3. Pilot rate: 4.5:1;
4. Balance valve relief setting pressure :
Adjustable pressure range: 140-350bar
Factory pressure setting: 315bar
5. Work temperature: -40°C~+80°C;
Ambient temperature: -50°C~+85°C;
6. Pressure increase: 130bar/circle;
7. Zinc-Nickel alloy plating outside.

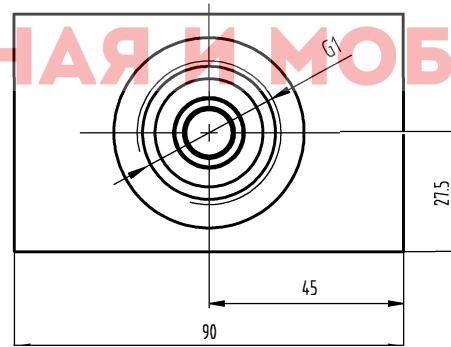

借通用件登记

描 图

校 核

旧底图总号

签 字

日 期

							ООО "АРИС"		
							Габаритный чертеж		
							AKT350-200		
标记	数量	更改文件号	签字	日期	图样标记		重量	比例	
设计			标准化					1:1.2	
审核									
工艺			日期		共 页		第 页		